

## (12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property  
Organization  
International Bureau



(43) International Publication Date  
23 December 2004 (23.12.2004)


PCT

(10) International Publication Number  
**WO 2004/110645 A1**

- (51) International Patent Classification<sup>7</sup>: **B05B 12/06**, A01G 25/16
- (21) International Application Number: PCT/IB2004/001948
- (22) International Filing Date: 11 June 2004 (11.06.2004)
- (25) Filing Language: English
- (26) Publication Language: English
- (30) Priority Data: VI2003A000115 13 June 2003 (13.06.2003) IT
- (71) Applicant and  
(72) Inventor: **DRECHSEL, Arno** [IT/IT]; Via Castel Mareccio, 4, I-39100 Bolzano (IT).
- (74) Agent: **MAROSCIA, Antonio**; MAROSCIA & ASSOCIATI SRL, Contrà S. Caterina, 29, I-36100 Vicenza (IT).
- (81) Designated States (*unless otherwise indicated, for every kind of national protection available*): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BW, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NA, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.
- (84) Designated States (*unless otherwise indicated, for every kind of regional protection available*): ARIPO (BW, GH, GM, KE, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IT, LU, MC, NL, PL, PT, RO, SE, SI, SK, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

[Continued on next page]

(54) Title: VACUUM GENERATING DEVICE, PARTICULARLY FOR OPERATING ACTUATOR MEMBERS IN FLUID DELIVERY SYSTEMS

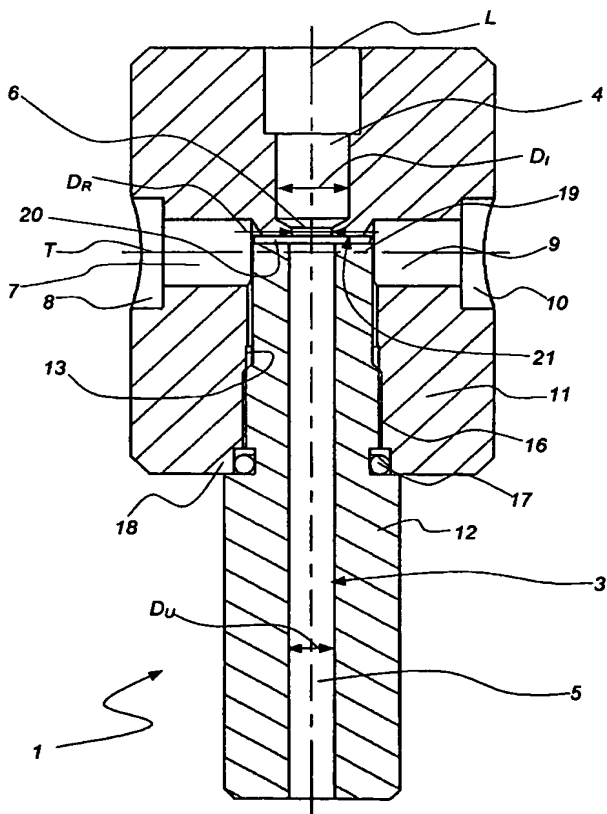

(57) Abstract: A vacuum generating device, particularly for operating actuator members in fluid delivery systems, comprises a duct (3) for a main pressurized fluid which extends along a longitudinal axis (L). The longitudinal duct (3) has an inlet portion (4), an outlet portion (5) and a restricted portion (6) interposed therebetween, which is adapted to generate a venturi-induced negative pressure. The device (1) further includes a first radial conduit (7) in fluid communication with the restricted portion (6) and with the outside, and at least one second radial conduit (9), which is also in fluid communication with the restricted portion (6) and with the outside



**Published:**

— with international search report

*For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.*